


**ROTENSO**<sup>®</sup>  
Live better





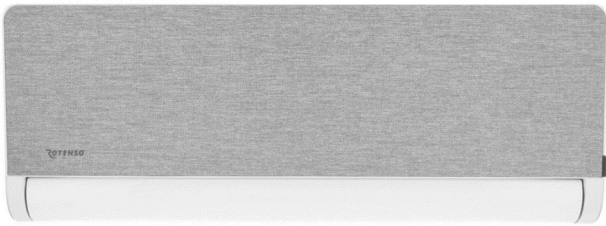

# VERSU CLOTH



Textile interchangeable front panels



Remarkably low noise emission of 19 dB



Automatic 4D louvres



Rotating louvre 180°



Super ionizer iAIR



Heating at low outdoor temp. down to -22°C



Versu Cloth Stone

Versu Cloth Caramel

Versu Cloth Stone offers a refreshing twist with its silver and grey hue, perfect for modern and neutral interiors.

The Versu Cloth boasts about of year-round functionality and the highest cooling energy efficiency class A+++.

Its operation is remarkably quiet, with a volume of only 19 dB at the lowest speed. The unit also features a cascading air supply facilitated by a horizontal rotating louvre spanning 180°.



## Interchangeable front panels

The air conditioner's design can be easily customized to suit any room, thanks to the textile interchangeable front panel. With a choice of nine different colours, you can adapt the unit appearance up to actual preferences.

88



### Heating at low outdoor temperature down to -22°C

The technology applied and the integrated winter package empower the air conditioner to operate efficiently, even in harsh weather conditions. The air conditioner provides heating efficiency even at low outdoor temperatures.



### Super Ionizer iAIR

By generating negative oxygen ions, the Super Ionizer iAIR effectively eliminates viruses, bacteria, dust mites, and allergens from the air. Unpleasant odours are swiftly removed upon contact with the ionizer, leaving the environment fresh and healthy.



**Silent  
operation at  
only 19 dB**

## Remarkably low noise emission of 19 dB

The unit supports ultra silent eMoto mode for undisturbed rest.



### **Automatic 4D louvers**


Inclusion of automatic 4D louvers with built-in actuators enables convenient control of both vertical and horizontal louvers via remote control or wall-mounted controller. This ensures maximum comfort during operation and facilitates efficient air distribution throughout the room.



### **Rotating louvre 180°**

The horizontal rotating louvre provides precise airflow in any direction within a 180° vertical range.



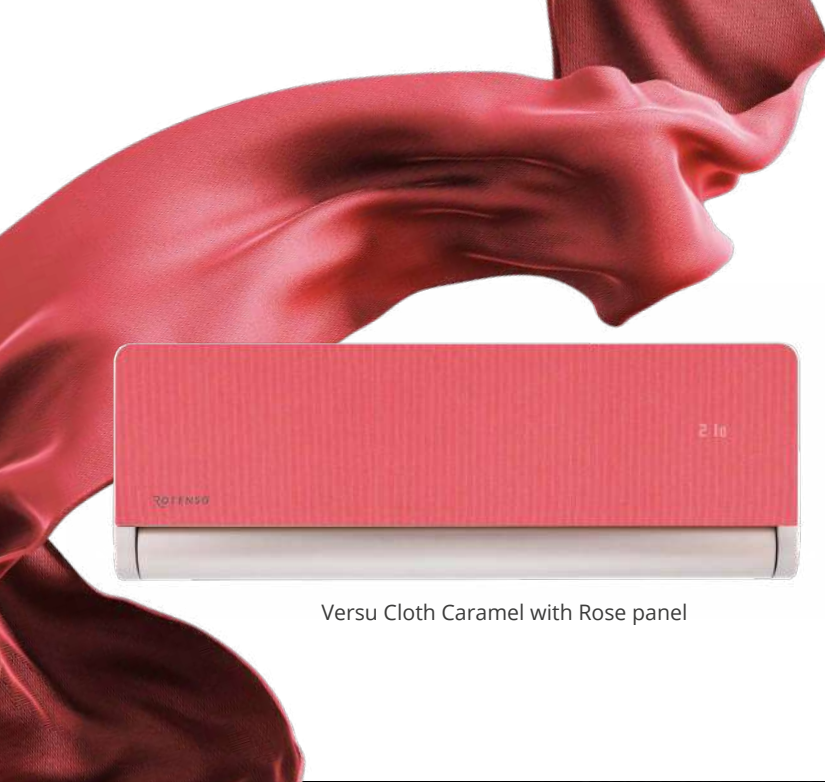

Versu Cloth Caramel with Rose panel

INSTANT DESIGN  
ADJUSTMENT?

**No problem!**  
**Design it yourself**

## VERSU CLOTH STONE




STONE PANEL INCLUDED

+



## VERSU CLOTH CARAMEL

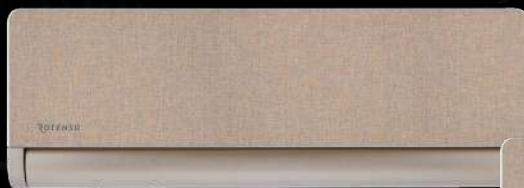

CARAMEL PANEL INCLUDED

+





Versu Cloth Stone

Versu Cloth Caramel

# TEXTILE INTERCHANGEABLE MAGNETIC PANELS

AVAILABLE COLOURS OF THE INTERCHANGEABLE TEXTILE:



Marine



Desert



Storm



Rose



Coral



Mint



Chrome



Caramel



Stone



EASILY INTERCHANGEABLE




WATER- AND STAIN-RESISTANT

Please note that the colours of the magnetic panels in print may vary slightly from catalogue colours.



# Versu Cloth Stone

2,6-5,3 kW

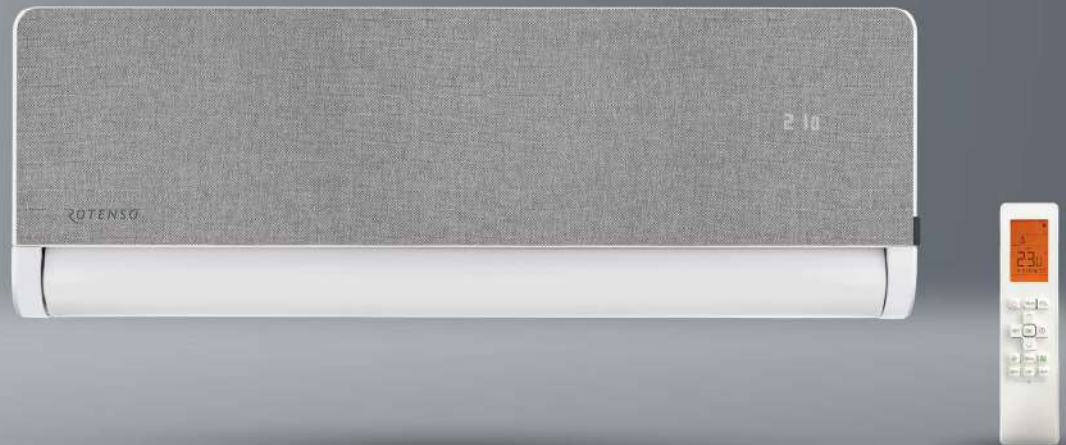

## Unit features

96

 Digital DC Inverter SKY <sup>®</sup>	 Textile changeable front panel	 Automatic purification iClean <sup>(1)</sup>	 Super Ionizer iAIR	 3-in-1 (Si.Ion + Photocat. + Nano) iAIR filter <sup>(1)</sup>	 Antibacterial HEPA iAIR filter	 Electrostatic HD iAIR filter	 Super Silent eMOTO mode <sup>(1)</sup>
 Automatic 4D louvres	 Rotating louvre 180°	 Turbo eMOTO mode <sup>(1)</sup>	 Upwards cascade air supply	 Downwards cascade air supply	 Air supply eMOTO control system	 Eco eMOTO mode <sup>(1)</sup>	 Wide-angle eMOTO air supply
 Humidity sensor <sup>(1)(2)</sup>	 SMART wi-fi	 Wired controller SMART port <sup>(2)</sup>	 SMART panel display ON/OFF	 SMART Follow mode	 Wireless remote control	 Wired controller <sup>(2)</sup>	 SMART heating to 8°C <sup>(1)</sup>
 Louvre setting memory	 1W standby mode <sup>(1)</sup>	 Auto restart memory	 Anti-corrosive gold fins	 Drip tray heater	 Compressor crankcase heater	 Silence mode	 Timer
 Cooling at low outdoor temp. down to -15°C	 Heating at low outdoor temp. down to -22°C <sup>(1)</sup>	 Double-sided condensate drainage	 Self-diagnostics	 Sleep mode	 BMS Modbus <sup>(2)</sup>	 BMS Bacnet <sup>(2)</sup>	

1. Feature not available in Multi Split system. 2. Feature is only optional. 3. Feature can be accessed via mobile app.

\* Silver Ion + Photocatalytic + Cold Nano

# Technical specification

Model			Versu Cloth Stone 2,6 kW	Versu Cloth Stone 3,5 kW	Versu Cloth Stone 5,3 kW	
Capacity	Cooling	Nom. (Min. - Max.)	W	2638 (1231-3297)	3516 (1320-4307)	5275 (1817-6008)
Rated input		Nom. (Min. - Max.)	W	600 (100-1260)	900 (130-1650)	1600 (140-2300)
Operating current		Nom. (Min. - Max.)	A	2,6 (0,4-5,5)	3,9 (0,6-7,2)	7,0 (0,6-10,0)
Capacity	Heating	Nom. (Min. - Max.)	W	2931 (847-3722)	3809 (879-4395)	5568 (1260-6154)
Rated input		Nom. (Min. - Max.)	W	623 (110-1320)	950 (120-1500)	1680 (220-2350)
Operating current		Nom. (Min. - Max.)	A	2,7 (0,5-5,7)	4,1 (0,5-6,5)	7,3 (1,0-10,2)
Reversible heat pump type				air-to-air	air-to-air	air-to-air
Design load in cooling mode			kW	2,6	3,5	5,3
SEER			W/W	8,8	8,5	6,3
Energy efficiency class, cooling				A+++	A+++	A++
Annual electric energy consumption, cooling			kWh/a	103	146	294
Design load in heating mode (T <sub>biv</sub> -7°C)			kW	2,5	2,5	4,1
SCOP			W/W	4,6	4,6	4,1
Energy efficiency class, heating				A++	A++	A+
Annual electric energy consumption, heating			kWh/a	776	776	1430
Dehumidification			l/h	1,0	1,2	1,8
Maximum energy consumption			W	2200	2200	2500
Maximum operating current			A	9,6	9,6	10,9
Indoor unit			VCS26Xi	VCS35Xi	VCS50Xi	
EAN product code			5905567601026	5905567601088	5905567601095	
Fan speed	T / H / M / L / ML / S		rpm	1122 / 910 / 823 / 710 / 652 / 600	1122 / 910 / 823 / 710 / 652 / 600	1150 / 970 / 880 / 800 / 760 / 670
Air flow	T / H / M / L / ML / S		m <sup>3</sup> /h	700 / 555 / 445 / 380 / 270 / 230	700 / 555 / 445 / 380 / 270 / 230	750 / 590 / 490 / 410 / 330 / 280
Sound pressure level	T / H / M / L / ML / S		dB(A)	40 / 32 / 27 / 24 / 21 / 19	40 / 32 / 27 / 24 / 21 / 19	41 / 36 / 30 / 28 / 24 / 19
Sound power level			dB(A)	53	53	54
Rated input			W	13	13	34
Operating current			A	0,1	0,1	0,1
Net dimensions		W × D × H	mm	920 × 211 × 321	920 × 211 × 321	920 × 211 × 321
Gross dimensions		W × D × H	mm	1005 × 295 × 385	1005 × 295 × 385	1005 × 295 × 385
Net weight / Gross weight			kg	11,3 / 14,2	11,3 / 14,2	11,5 / 14,4
Condensate drain			mm	16	16	16
Outdoor unit			VO26Xo	VO35Xo	VO50Xo	
EAN product code			5905567606649	5905567606663	5905567606687	
Fan speed	H / M / L		rpm	800 / 620 / 450	800 / 620 / 450	760 / 650 / 490
Maximum air flow			m <sup>3</sup> /h	2200	2200	2100
Sound pressure level			dB(A)	53	53	54
Sound power level			dB(A)	62	62	63
Net dimensions		W × D × H	mm	765 × 303 × 555	765 × 303 × 555	805 × 330 × 554
Gross dimensions		W × D × H	mm	887 × 337 × 610	887 × 337 × 610	915 × 370 × 615
Bracket spacing		W × D	(mm)	452 × 286	452 × 286	511 × 317
Net weight / Gross weight			kg	26,4 / 28,8	26,4 / 28,8	33,5 / 36,1
Refrigerant	Type			R32	R32	R32
	GWP			675	675	675
	≤ 5m	kg		0,7	0,7	1,1
		TCO <sub>2</sub> eq		0,47	0,47	0,74
Charged > 5m		g/mb		12	12	12
Pipe connections		Liquid/Gas	mm (inches)	Φ6,35 / Φ9,52 (1/4" / 3/8")	Φ6,35 / Φ9,52 (1/4" / 3/8")	Φ6,35 / Φ12,7 (1/4" / 1/2")
Maximum installation length			m	25	25	30
Maximum height difference			m	10	10	20
Compressor type				Rotary DC	Rotary DC	Rotary DC
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1f	220-240-50, 1f	220-240-50, 1f
Electrical protection			A	C10	C10	C16
Power cables: outdoor unit			pcs × mm <sup>2</sup>	3 × 1,5	3 × 1,5	3 × 2,5
Control and power cables: indoor unit - outdoor unit			pcs × mm <sup>2</sup>	5 × 1,5	5 × 1,5	5 × 2,5
Control and power cables: hiro unit - indoor unit			pcs × mm <sup>2</sup>	4 × 1,5	4 × 1,5	4 × 1,5
Indoor operating range (cooling / heating)			°C	16-32 / 0-30	16-32 / 0-30	16-32 / 0-30
Outdoor operating range (cooling / heating)			°C	-15-50 / -22-30	-15-50 / -22-30	-15-50 / -22-30
Compatible systems						
1:1 SINGLE				•		
1:2 DUAL						
1:X MULTI				•		